

Video Door bell with keypad - 2Wire

SKU: EV2WDP601FKP- (flush mount)

EV2WDP601KP- (surface mount)



Outdoor Station

This is a multifunctional station that delivers video, audio and lock control of the highest quality and dependability. The high-performance keypad enhances the capability of the doorbell video phone to include keyless entry for those who have the code. Other features include:

Here are its top features:











Features and Specifications

- ARS 105 visual degree high resolution Camera
- CCD color camera with LED for night view
- Keypad password access control
- Backlit nameplate and keypad for ease of use in the dark
- Support two kinds of lock (power on/off)
- 420 TV Lines
- Adjustable camera angle to maximize visibility in your location (maximum angle: 72 degrees)
- Call button with programmable OFF/ON
- Lock control from both the inside monitors and the doorbell video phone keypad
- Hands-free communication – there is no handset
- Programmable codes for users and system administrator
- 40 user codes each output plus temporary codes that can be given to one-time contractors or vendors
- Green Energy Feature - Programmable keypad
Programmable unlock time from 1 to 99 seconds
- Selectable unlock mode – NO and NC
- Disable/Enable the keypad touch tone
- Adjustable keypad touch sensitivity 1 to 5
- Anti-vandal stainless steel housing
- Weather-protection frame and 4mm Plexiglas with outstanding ingress protection against debris and moisture (IP55)

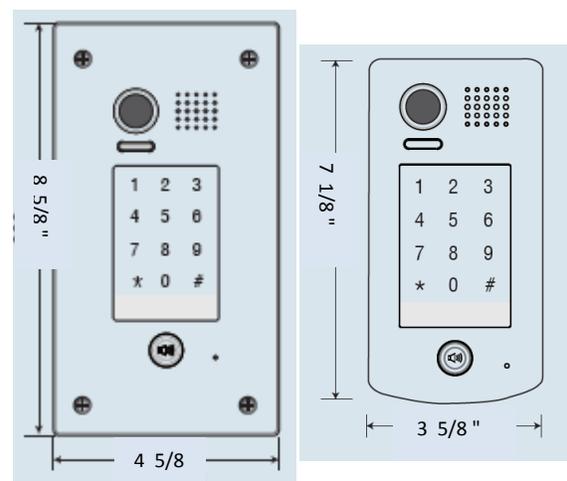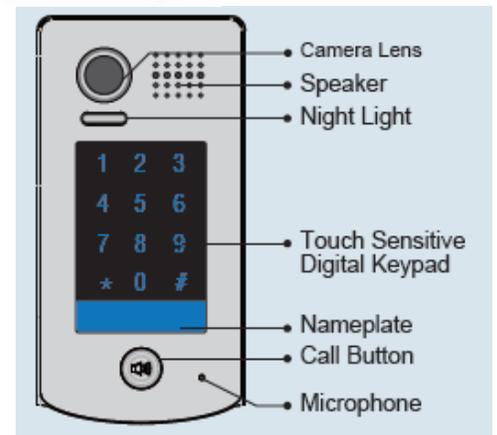

Specifications are subject to change without notice. Entry Vision is not responsible for any typographical errors.

- Power Consumption: 0.9W standby, 4W Operational
- 2 Relay Outputs NO, COM dry contact: Max. 48V dc 1.5A Practical for adjacent doors
- Operating temperature: -10C to +45C /14F to 113F
- Flush or surface mounting
- Anti-tamper screw installation
- Dimension: 8 5/8(H) X 4 5/8 (W) X 1 7/8" (D) inch (flush mount); 7 1/8(H)X 3 5/8 (W)X 1 1/8 (D) inch (surface mount)

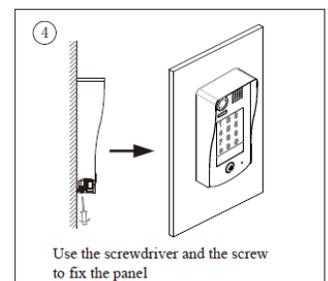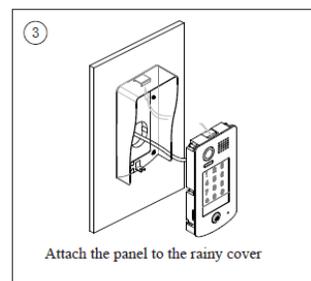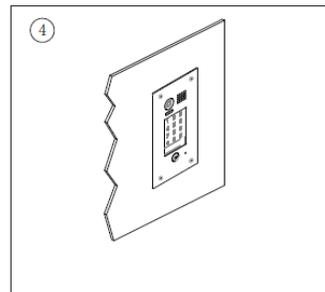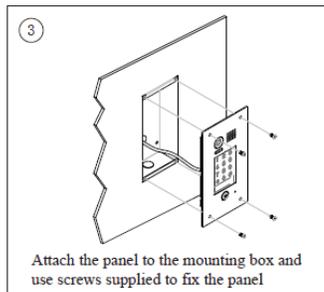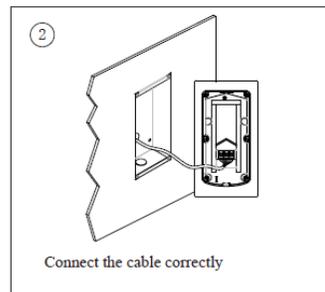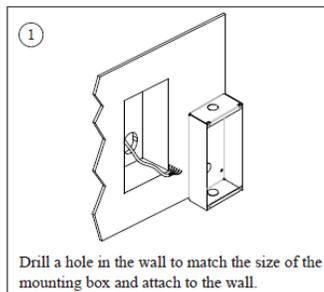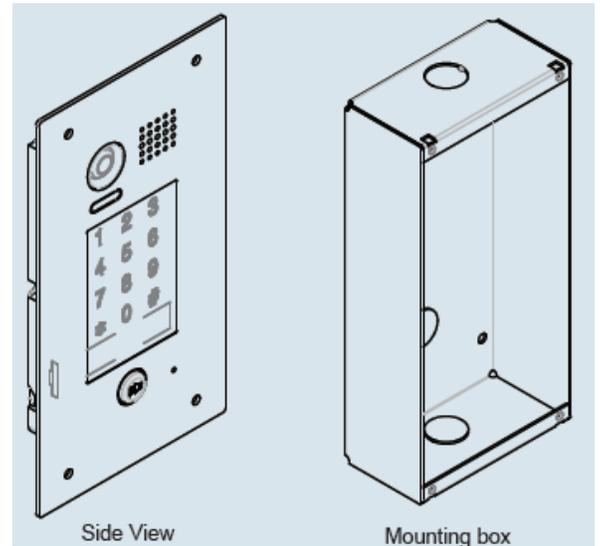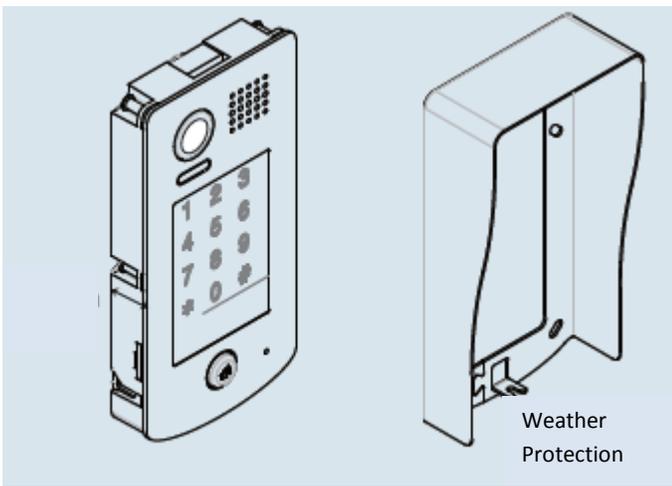

Specifications are subject to change without notice. Entry Vision is not responsible for any typographical errors.