

Access Control Backlit Keypad-100 users

SKU: 9522BL

Features and Specifications

This stand alone Access Control keypad has 2 relay outputs controlled by 2 groups of independent authorized user codes. Easily programmable via its keys, confirming completion of each step with 2 beepw. The keys are back lit with an automatic intensification of light when touched and dimming seconds after they are pressed.

Features and Specifications

- Up to 100 individual Access Codes can be assigned to relay 1 and 10 codes to relay 2
- 10 Million code combinations available
- Door open by Relay 1 - unlocking time programmable from 1 to 999Sec
- Relay 2 - unlocking time programmable from 1 to 999Sec
- Both Output relays can be programmed to toggle (Start/Stop) mode. First code enter for unlock next enter same code for lock and so forth
- Keypad status is indicated audio visually by 3 bright LEDs and a distinctive audio tone
- Back lit keypad provides excellent visibility at night
- Key in an assigned code and enable or disable via output 2 an Alarm system
- Quick Duress Code
- Tamper Switch can operate Alarm or Horn
- Egress input for push button activation of a quick exit
- Manager Code allows assignment of codes to single and multiple users
- Perfect choice for controlling security systems, automatic operators and machinery
- Access Codes can be assigned in two optional modes:
 - Single User for the general users
 - Multi-User Mode for the advanced users
- Independent door lock inhibit authorization code is also available to control the operation of the keypad
- Auto Code and Manual Code for both user modes
- Programmed information is stored in non-volatile memory and will be available after power failure





Specifications are subject to change without notice. Entry Vision is not responsible for any typographical errors.

- Self Locking feature to protect against code tampering
- Interior use only.

Technical Specifications

- Open collector outputs for duress, alarm, key active mode, inter-lock and output 2: 100mA Sink/ 24VDC Maximum Rating
- Output Relay 1- N.C. & N.O. Dry Contact, 5A/24VDC Maximum
- Output Relay 2- N.C. & N.O. Dry Contacts, 1A/24VDC Maximum (Version A)
- Tamper Switch- N.C. Dry Contact; 50mA/24VDC
- Direct 12-24V AC/DC Operation
- Operating Current: 50 (Quiescent) to 150mA
- Operation Temperature:-4F to 160F / -20C to +70C
- Environmental Humidity: 5-95% Relative Humidity, Non-condensing
- Operation Environment & Ingress Protection: Indoors. Additional ABS cover will enhance the keypad weather protection subject to installation, surface and actual fitting.
- Flush Mount on Gang Box or on The Supplied Surface Mount Box
- Keypad Dimensions: 4 5/8" H x 2 7/8" W x 1 5/8" D
- Package Content
- One Keypad
- Customized Flip on weather protect cover
- One pack of Mounting Screws
- Surface mount single gang box, upward inclined.
- One Wire Harness (Six wires)
- One Programming & Installation Manual

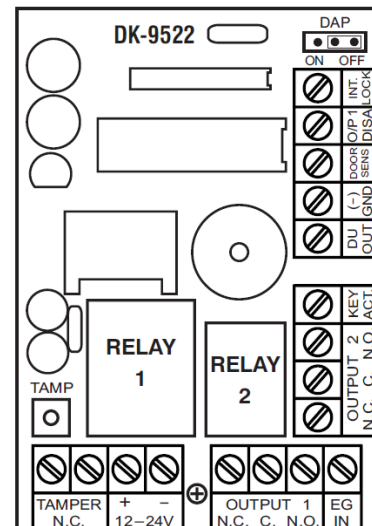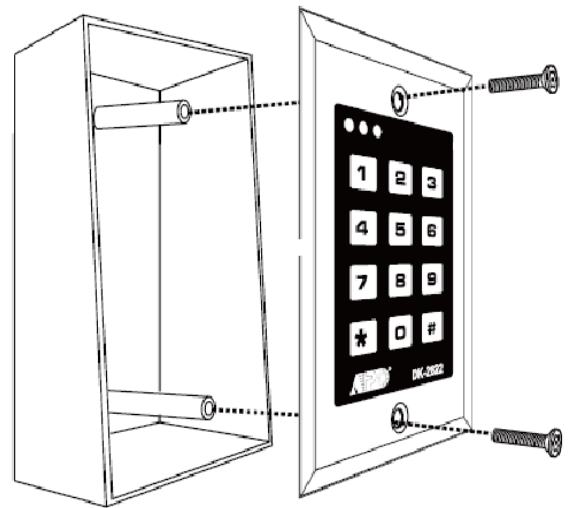

Specifications are subject to change without notice. Entry Vision is not responsible for any typographical errors.